


# 1295 1296

Single-needle and two-needle  
lockstitch postbed sewing machine  
with unison feed




# PFAFF 1295/96

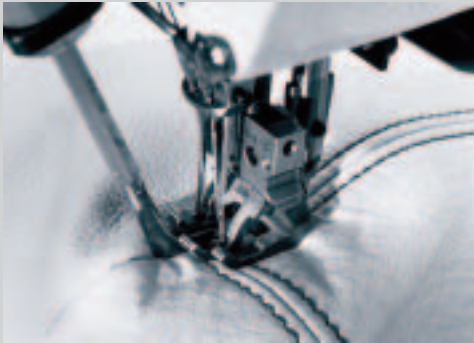

## Special features:


- Unobstructed view of the stitching area
- The postbed design is ideal for handling shaped parts before or after they are closed
- Trouble-free stitching over cross-seams with no difference in stitch length, due to the alternating top feed with 7 mm stroke
- Accurate and consistent stitch formation on all materials, up to thread sizes of 15/3-ply, synth.
- Uncomplicated mechanical system guarantees perfect function
- Built-in bobbin winder within operator's view
- Large vertical hook with 60% more thread capacity than conventional hooks
- Protection of the hook against thread jamming by built-in and easy-to-handle overload clutch as standard equipment
- High sewing output and easy operation due to time- and cost-saving work aids, such as:
  - Thread trimmer
  - Automatic presser foot lift
  - Backtacking mechanism
  - Needle positioning mechanism
- Large fabric clearance of 14 mm for easier loading and removal of the workpiece
- As an alternative available with a long stitch (up to 11 mm) for rustic stitching

## PFAFF 1295



**-6/01**


For plain seaming operations



**-17/01-940/01**

Part set for binding, with balcony-shaped needle plate for sewing convex-shaped workpieces (binding attachment required as extra)

## PFAFF 1296




**-6/01**

For plain seaming operations



**-63/14**

Fancy- and top-stitching operations, also on one-sided bulky cross-seams; compensating presser with seam guide, tape guide from below



**-63/15**

Fancy- and top-stitching operations, also on one-sided bulky cross-seams; compensating presser, pneumatically operated, engageable middle seam guide and tape guide from below

## Models and Work aids from the PFAFF 1295/1296:

### Models:

- C** For medium to heavy materials
- L** Leathers
- S** Fabrics
- M** Overload clutch for protection of hook
- N** Max. stitch length 6 mm, forwards and reverse
- P** Four-motion drop feed version

### Work aids:

#### -900/56

Thread trimmer

#### -911/97

Automatic presser foot lift and backtacking

(for operation a pneumatic air filter/regulator is required, Pfaff part No. 91-187 426-70/893)

<b>Standard sales range</b>	Thread trimmer -900/56	Automatic presser foot lift and backtacking -911/97	Four-motion drop feed	Needle gauge
1295-6/01 CLMN				
1295-6/01 CLPMN			●	
1295-6/01-900/56 CLMN	●			
1295-6/01-900/56 CLPMN	●		●	
1295-6/01-900/56-911/97 CLPMN	●	●	●	
1295-17/01-650/03-940/01 CLMN				
1295-6/01-911/97 CLPM N11		●	●	
1296-6/01 CL x 3.2 PMN			●	3.2
1296-6/01 CL x 6.0 MN				6.0
1296-6/01 CL x 10.0 MN				10.0
1296-6/01 CL x 10.0 PMN			●	10.0
1296-6/01-900/56 CL x 3.2 PMN	●		●	3.2
1296-6/01-900/56-911/97 CL x 3.2 MN	●	●		3.2
1296-6/01-900/56-911/97 CL x 4.8 PMN	●	●	●	4.8
1296-6/01-900/56-911/97 CL x 6.0 PMN	●	●	●	6.0
1296-6/01-900/56 CL x 10.0 MN	●			10.0
1296-6/01-900/56 CL x 10.0 PMN	●		●	10.0
1296-6/01-900/56-911/97 CL x 10.0 MN	●	●		10.0
1296-63/14-900/56 CL x 8.0 PMN	●		●	8.0
1296-63/15-900/56-911/97 CL x 6.0 MN	●	●		6.0
1296-63/15-900/56 CL x 8.0 MN	●			8.0
1296-63/15-911/97 CL x 10.0 PM N11		●	●	10.0
1296-63/15-911/97 CL x 12.0 PM N11		●	●	12.0

### Separately available part sets for the PFAFF 1296 without -900/56

-6/01 C x 3.2 N	91-202138-00/003
-6/01 C x 6.4 N	91-202138-00/005
-6/01 C x 8.0 N	91-202138-00/006
-6/01 C x 10.0 N	91-202138-00/002
-63/03 C x 8.0 N	91-202190-00/001
-63/03 C x 10.0 N	91-202190-00/002

### Separately available part sets for the PFAFF 1296-900/56

-6/01 C x 3.2 N	91-202139-00/002
-6/01 C x 6.4 N	91-202139-00/003
-6/01 C x 8.0 N	91-202139-00/004
-6/01 C x 10.0 N	91-202139-00/005

More parts sets on enquiry

## Specifications:

**Stitch type:**

301 (lockstitch)

**Maximum speeds:****1295:**

1,900 s.p.m.

**1295-6/37:**

2,200 s.p.m.

(link take-up)

**1296:**

1,800 s.p.m.

The maximum speed depends on the stroke, stitch length, material and sewing operation

**Fabric clearance:**

14 mm

**Top feed stroke:**

7 mm

**Needle size:**

110 to 180

**Needle system:**

134-35

**Usable thread size:**

15/3-ply

**Model: C****Clear workspace:**

270 x 270 mm

**Motor:**

0.55 kW

**Bedplate dimensions:**

518 x 177 mm

**Net weight:**

approx. 56 kg

**Gross weight:**

approx. 64 kg

**Carton dimensions:**

80 x 71 x 31 cm

**Effective balance wheel dia.:**

90 mm

BILLS SEWING MACHINE CO.  
301 MAIN AVE EAST  
HILDEBRAN, NC 28637  
BRS@BILLSEWING.COM  
WWW.BILLSEWING.COM  
(828) 397-6941 (828) 328-5816

The machine is equipped as standard with finger guard, belt- and take-up lever guards.

**Hotlines:**

Technical service: +49-175/2243-101

Application consultancy: +49-175/2243-102

Spare-parts hotline: +49-175/2243-103



**Europäische Union**  
Wachstum durch Innovation – EFRE

**PFAFF Industriesysteme und Maschinen AG**

Hans-Geiger-Str. 12 – IG Nord  
D-67661 Kaiserslautern

Telefon: +49-631/200-0

Telefax: +49-631/17202

E-mail: [info@pfaff-industrial.com](mailto:info@pfaff-industrial.com)

Printed in Germany  
engl.  
296-12-18730 03/07